

1

2



3

4


5

SPECIFICATIONS

Current Rating: 1 Amps
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40°-+105°C
 Max Processing Temp: 230° for 30~60 seconds
 (260° for 10 seconds)
 Contact Material: Phosphor bronze
 Insulator Material: Polyester,UL 94V-0
 ◎Standard:Nylon-6T

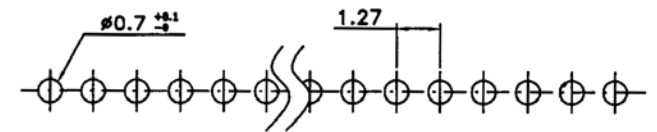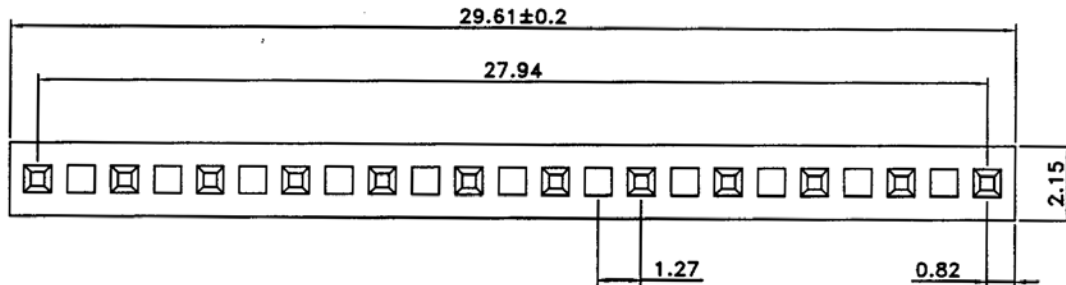

P.C.B LAYOUT

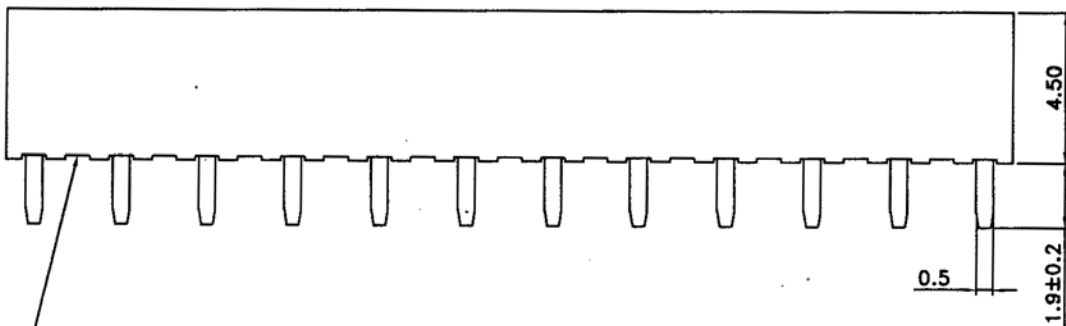

E2,4,6,8,10,12,14,16,18,20,22

需测量的重要尺寸	测量工具
PITCH: 1.27±0.05mm	PCB 测试板
DIP: 1.9±0.2mm	游标卡尺

				DRAWN: JACK	GENERAL TOLERANCE: .X=±0.2 .XX=±0.15	 ELECTRONIC ASSEMBLY new display design		
E				CHECKED:			UNIT: MM	DESCRIPTION:
D				APPROVAL: JACK	SCALE:	1.27MM CENTER SINGLE ROW PCB SOCKET	A4	
C					SHEET: 1 / 1	PART NO:		
B	02-18-2003				PROJECTION:	EA B254-12		
A	01-17-2003							
REV	DATE	FILE	BY					